# m o o i



## Raimond

Based on pure mathematics the beauty of light has been re-defined; staring into the universe is now possible, also during cloudy nights.

Designer Year of design Material Raimond Puts 2007 stainless 'spring steel'

# m o o i

### detailing



### paths to create an atmospheric ambiance. The transparant lenses are specially detailed to spread warm white light in every direction. Please refer to the manual and safety instructions for more information on installation

The intricate spheres of Raimond transport the electrical current. The LED terminals then join these

### colour

Stainless steel

## technical general

#### amount of LED`s

R43: 92, power consumption 15W (22lm/W) R61: 162, power consumption 25W (26lm/W) R89: 252, power consumption 35W (19lm/W) ZAFU: 162, power consumption 25W (26lm/W) R127: 492, power consumption 46W (36lm/W) R163: 812, power consumption 70W (36lm/W) R199: 1212, power consumption 100W (41lm/W)

Voltage on lamp sphere < 5V DC

colour temperature (degrees Kelvin, K) 2700K (warm white, comparable to incandescent)

#### colour rendering index

CRI\_Ra 71, colour rendering group 2

#### luminous flux (Lumen, Im)

R43: 329lm ( 40W incandescent) R61: 644lm ( 60W incandescent) R89: 790lm ( 75W incandescent) ZAFU: 510lm ( 40-60W incandescent) R127: 1684lm R163: 2779lm R199: 4148lm

ELUMDAT files are available at the Moooi website inside the product download section.

## technical CE (r43/r61/r89/zafu)

CE

Dimmable, refer to dimmer list below for compatible dimmers Input voltage of 220-230V ~50Hz AC

Cable length 4M (transparent) can be shortened down to 30cm.

Non dimmable (UN version) suitable for input voltages of 110V - 240V also available.



Stainless steel canopy with included power supply

#### recommended dimmers

Dimmers below (make & type) have proven to show a fluent dimming behaviour with *CE version*: GIRA 226200 (replaces 030600) R,L JUNG 225TDE TRONIC (R,C) JUNG 244HEX20-500 R,L INSTA 51180 R,L PEHA 435 HAN R,L PEHA 433 HAB TRONIC (R,C) Cooper control iLight system source controllers: SCI0410, SCI0805, SCI1205, SCI1210, SCI1220 UNOTECH, type LD-100P

Or similar specifications. Lowest dimming position will be approx. 20% -25% depening on dimmer/ lamp combinations.

Please note when using other dimmers (other types and/or manufacturers) than recommended the dimming curve may not be as fluent, in certain positions flickering or other inconsistencies could occur.

## technical cULus (r43/r61/r89/zafu)



Dimmable, refer to dimmer list below for compatible dimmers Suitable for input voltage of 110V -127V. Cable length 4M | 13.1ft (transparant) can be shortened down to 30cm | 11.8".

For the US and Canadian market only.

White steel canopy with included power supply

### recommended dimmers

Dimmers below (make & type) have proven to show a fluent dimming behaviour with *cULus version*: Lutron CT-603PGH-WH Lutron DIVA DV-603PG Lutron DV-600P Lutron CTCL-153 PD

Or similar specifications. Lowest dimming position will be approx. 20% -25% depening on dimmer/ lamp combinations.

Please note when using other dimmers (other types and/or manufacturers) than recommended the dimming curve may not be as fluent, in certain positions flickering or other inconsistencies could occur.

## technical ce (RI27/RI63/RI99)

CE


Input voltage of 110- 240V ~50Hz/ 60Hz AC voltage on lamp sphere < 5V DC

Cable length  $10M \mid 32,8ft$  (transparent) can be shortened down to +/- 0,8M  $\mid 2.6ft$ . Please refer to line drawings below for exact cable lengths.

ELUMDAT files are available at the Moooi website inside the product download section.


Dimmable version available, only dimmable with the included remote control.

Power supply included in driverbox. <u>No canopy included</u>, for more information on installation refer to the manual.



## radiation diagram

This diagram shows the luminous intensity of the luminary, it emits light in all directions equally. ELUMDAT files for all versions available at the Moooi download area.

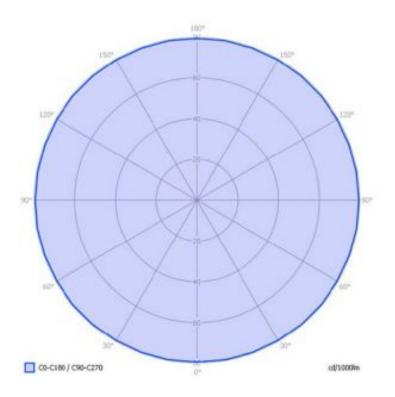

## 

## packaging

R43	R61	R89	ZAFU
H 58 cm   22.8"	H 72 cm   28.3"	H 103 cm   40.5"	H 39 cm   15.4"
W 52 cm   20.5"	W 72 cm   28.3"	W 103 cm   40.5"	W 83 cm   32.7"
D 52 cm   20.5"	D 72 cm   28.3"	D 103 cm   40.5"	D 83 cm   32.7"
Colli I/I	Colli I/I	Colli I/I	Colli I/I
Product weight:	Product weight:	Product weight:	Product weight:
I,5 KG   3.3 lb	2,0 KG   4.4 lb	2,5 KG   5.5 lb	3,5 KG   7.7 lb
With packaging:	With packaging:	With packaging:	With packaging:
4 KG   8.8 lb	7 KG   15.4 lb	12 KG   26.5 lb	5 KG   11 lb
R127	R163	R199	
H 150 cm   63.4"	H 197 cm   77.6"	H 234 cm   92.1"	
W I50 cm   61.4"	W 192 cm   75.6"	W 229 cm   90.2"	
D 150 cm   61.4"	D 192 cm   75.6"	D 229 cm   90.2"	
Colli I/I	Colli I/I	Colli I/I	
Product weight:	Product weight:	Product weight:	
4,5 КС   10 Ь	7,5 KG  16.5 lb	l 2,5 KG   27.5 lb	
With packaging:	With packaging:	With packaging:	

## cleaning instructions

117,5 KG | 259 lb

Can be effectively cleaned using a regular household dust cloth or feather duster. Lightly dust inbetween each component when the lamps are not in use. Moooi recommends always reading the label of any cleaning products you wish to use on or near any item from the Moooi collection. For further information on how to clean this product please contact your nearest Moooi agent or dealer which can be located through our website.

120 KG | 264.5 lb


### stainless steel

80,5 KG | 177.5 lb

Stainless steel gets the "stainless" portion of its name from its chromium oxide coating that resists staining, pitting and rusting. But although it holds up better than other metals, stainless steel is not impervious to rust. Time and certain environmental conditions like salt air will slowly erode stainless steel's protective coating. When the chloride in the aerosolized salt in salt air lands on the surface of the stainless steel, it breaks down the chromium oxide.

## **MOOOi**

## dimensions (R43 / R61 / R89 / ZAFU)

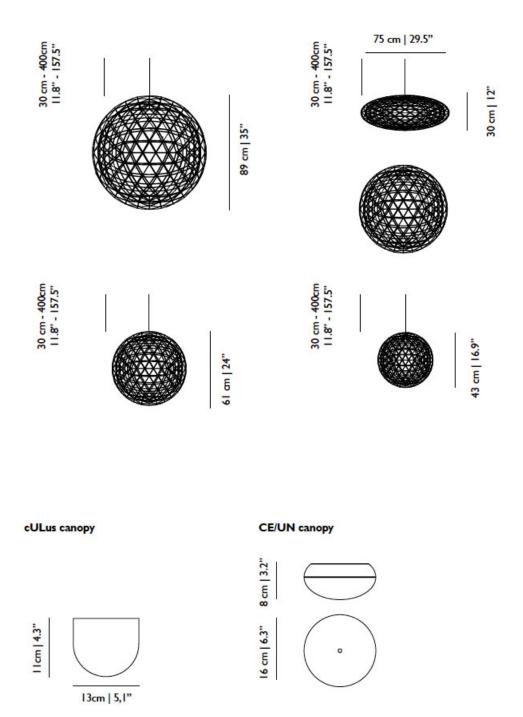

## dimensions (RI27/RI63/RI99)

