



PRODUCT DATA SHEET  
Inverted Shadows Suspension

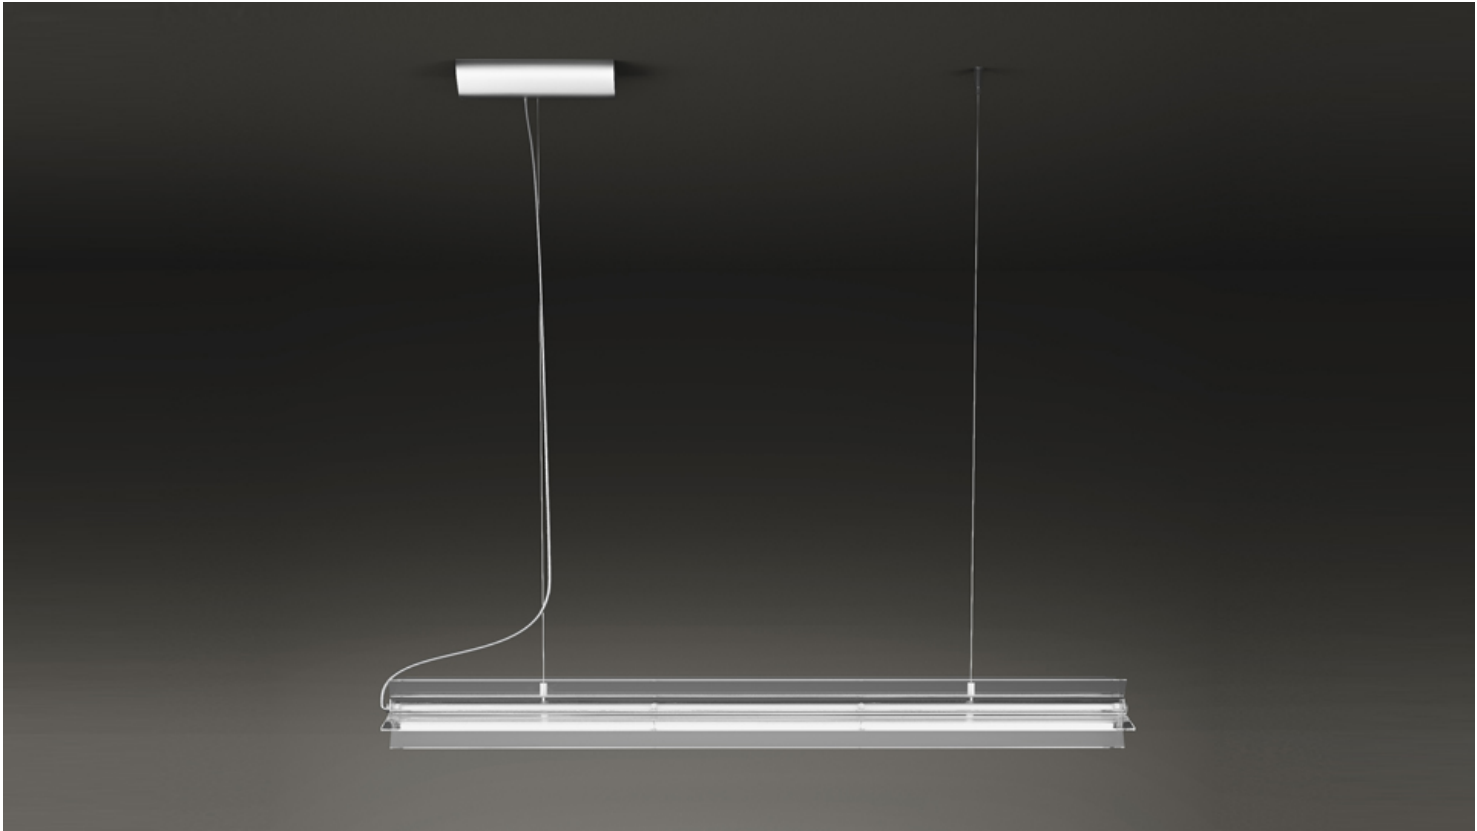

The appliance is available in the wall, suspension, and floor versions. The clear methacrylate body accommodates a very small (16X16mm) linear extruded aluminium element, which contains the LED strips and an optical unit with an elliptical beam angle. The possibility to rotate the luminous engine provides different light emission options according to the latter's position inside the methacrylate body: uplight or downlight wallwasher, indirect, or direct diffused. A very mild diffusing treatment of the body ensures optimal performance, in the diffusing emission option, for soft ambient lighting.


LEDDirect + indirect emission non dimmable



W	Weight	Luminous Flux (lm)	Color	Code
35W		1820lm		NEW

IP20

Inverted Shadows SuspensionLED	LED	luminaire
Power	30W	35W
Flux	2600lm	1820lm
CCT	3000K	3000K
CRI	80	
Color Tolerance	7	
Service Life	L70(9K) > 36,300	
Efficiency		70%
Efficacy	87lm/W	52lm/W

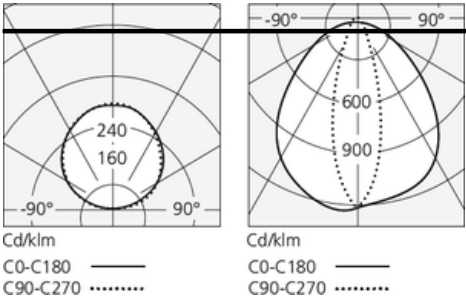

## Designers



Cino Zucchi