





CEILING SUSPENDED

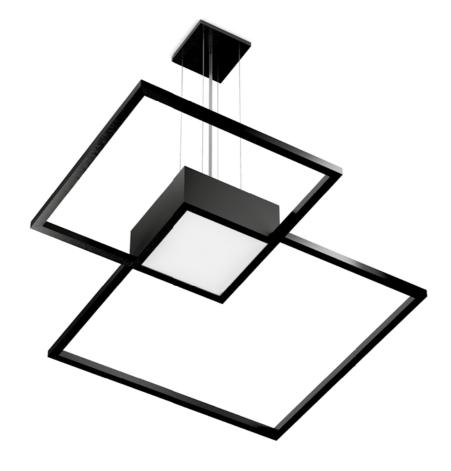



3.0

LED 47W | 220-240VAC | 50-60Hz PCB 3-step | phase-cut dim aluminium powder coated opal PMMA cover

 ▼
 2.90kg
 ⊕
 IP20
 0,3+0
 P

3000K | >80 CRI | direct 400lm, indirect 2500lm

CODE 149384W4 149384B4